

WARNING TAPE REEL LIZARD

No. 223-AN

Surrounded by safety



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**






HELP THE ENVIRONMENT

Depending on the item, the packaging may contain one or more of the following materials - to be recycled according to local municipal or state regulations.

cardboard • polyethylene bag • polystyrene
paper • wood • nails • plastic straps
cellophane • paper clips • gummed paper

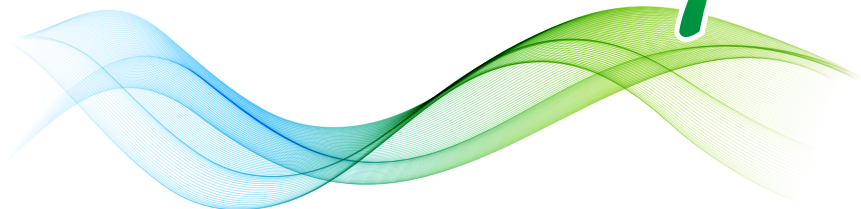



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**



DESIGN IS

Art





**ADVANCED FLUID
MANAGEMENT SOLUTIONS**

WARNING TAPE REEL LIZARD



STRENGTH POINTS

- AISI 304 stainless steel automatic hose guide suitable for potential corrosive atmospheres.
- Repeated spring stress-tests guarantee decades of life and efficiency.
- Speed control rewinding brake is available as accessory with specific P/N.
- Carabiner hook in aluminum as standard with the selected tape.
- White-red and yellow-black tapes available.
- Stopping pawl easy to remove for maintenance or when the work requires free sliding.
- Anti-shock technopolymer protecting cover.
- Fixing bracket that can be rotated up to 90° per side and with 2 slotted holes for safe, easy installation. The bracket can be locked in place with a screw, making the cable reel fixed.

TECHNICAL CHARACTERISTICS

Visit our
website



TAPE GUIDE

in AISI 304 stainless steel

STOPPING PAWL

easy to remove for maintenance or when the work requires free sliding.

DELIMITATION TAPE

White-red and yellow-black tapes available.

CARABINER HOOK

in aluminum.

SPRING


Tested to withstand over 20000 work cycles.

FIXING BRACKET

Can be rotated up to 90° per side and has 2 slotted holes for safe, easy installation.

BAYONET BRACKET


Lets you quickly move the hose tape around the various workstations.

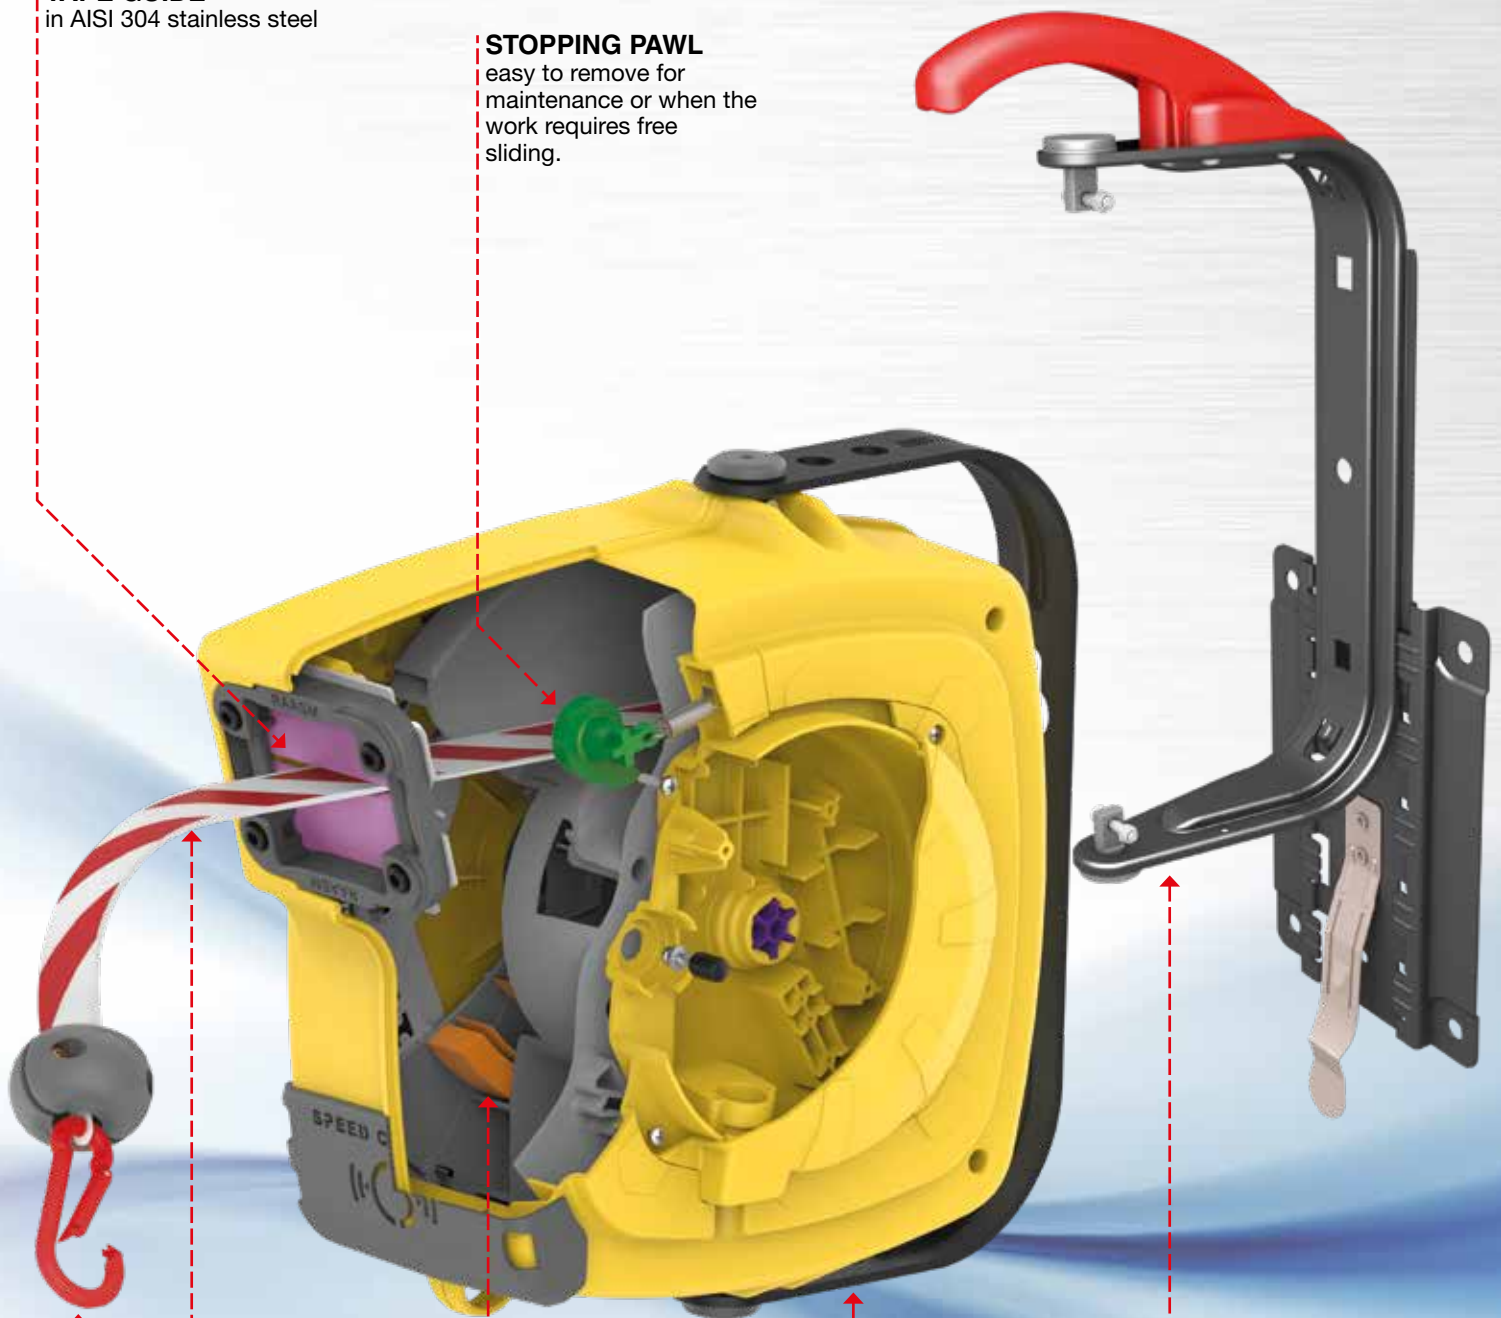



WARNING TAPE REEL “LIZARD” IN TECHNOPOLYMER S. 280

RAASM warning tape reels are the ideal solution for all those situations where it's necessary or mandatory to delimit the dangerous working areas both for the operators and the external people. There are many applications examples: fuel loading on tanks in service stations or goods and luggage unloading in airport. The warning tape reel is designed to satisfy the main RAASM quality characteristics in terms of structure and durability.



max temperature 70 °C



**FIXED AND
SWIVELLING**

COVER COLORS

Shockproof plastic

STANDARD

RAL 1004

Overall dimensions without bayonet bracket (mm)	Overall dimensions with bayonet bracket (mm)	Packaging (mm) W x D x H	
			440 x 195 x 485
			No. 40 packages per pallet

(W: width - D: depth - H: height)



P/N	Tape color	Length	Weight
92800.010	White - Red	16 m	5,7 kg
92800.020	Yellow - Black	16 m	5,7 kg

Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m



SPEED CONTROL

The versions listed below come with clutch so that tape rewinding can be performed at a controlled speed. They are marked by the **SPEED CONTROL** dataplate.

P/N	Tape color	Length	Weight
92840.010	White - Red	16 m	6,1 kg
92840.020	Yellow - Black	16 m	6,1 kg

Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m

RELATED ITEMS



P/N	Type of cable	Cable length
1064P	1 x 6 - PUR	14,5 m
1064PF	1 x 6 - PUR	14,5 m



P/N	Type of cable	Cable length
735131.60141	1 x 6 - PUR	14,5 m
735131.60261	1 x 6 - PUR	26 m

ACCESSORY FOR WARNING TAPE REEL

P/N 89003

Bayonet bracket, lets you easily move the tape reel within the various workstations.



EXAMPLES OF WARNING TAPE REEL WITH ACCESSORIES





■ Technology

The research and development of cutting-edge solutions, carried out entirely in Italy, is the starting point for the entire production cycle.



■ Quality

Offering high-quality products is one of our main objectives. Specific and rigorous tests accompany every single stage of the production process.



■ Efficiency

RAASM offers a complete range of fluid management solutions suitable for many different sectors of use. Our success is founded on the ability to identify and satisfy the specific needs of our customers.



Company with an
ISO 9001:2015
certified quality
management system

RAASM S.p.A.
36022 S. ZENO DI CASSOLA (VI)
Via Marangoni, 33 - ITALY

Export department
Tel. +39 0424 571130 - Fax +39 0424 571135

Technical department
Tel. +39 0424 571150 - Fax +39 0424 571155
info@raasm.com - www.raasm.com



WRV223AN-GB

Authorized dealer

All rights reserved by Raasm S.p.A.